



Oxford Cambridge and RSA

**Monday 19 June 2023 – Morning**

**A Level Computer Science**

**H446/02 Algorithms and programming**

**Time allowed: 2 hours 30 minutes**



**You can use:**

- a ruler (cm/mm)
- an HB pencil

**Do not use:**

- a calculator



Please write clearly in black ink. **Do not write in the barcodes.**

Centre number

--	--	--	--	--

Candidate number

--	--	--	--

First name(s)

---

Last name

---

**INSTRUCTIONS**

- Use black ink. You can use an HB pencil, but only for graphs and diagrams.
- Write your answer to each question in the space provided. If you need extra space use the lined pages at the end of this booklet. The question numbers must be clearly shown.
- Answer **all** the questions.

**INFORMATION**

- The total mark for this paper is **140**.
- The marks for each question are shown in brackets [ ].
- Quality of extended response will be assessed in questions marked with an asterisk (\*).
- This document has **32** pages.

**ADVICE**

- Read each question carefully before you start your answer.

**PLEASE DO NOT WRITE ON THIS PAGE**

Section A

1 A tree is one example of a data structure.

(a) (i) Give **two** characteristics of a tree data structure.

1 .....

.....

2 .....


.....

[2]

(ii) The following data is entered into a binary search tree.

22    13    5    36    55    14    8

Draw the binary search tree when the given data is entered in the order given.



[4]


(iii) Describe how a **leaf node** is deleted from a binary search tree.

.....  
.....  
.....  
..... [2]

(iv) Describe how a binary search tree can be searched for a value.

.....  
.....  
.....  
.....  
.....  
.....  
.....  
.....  
..... [4]

- (v) Identify the order that the nodes will be visited in a **depth-first (post-order)** traversal of this binary search tree.

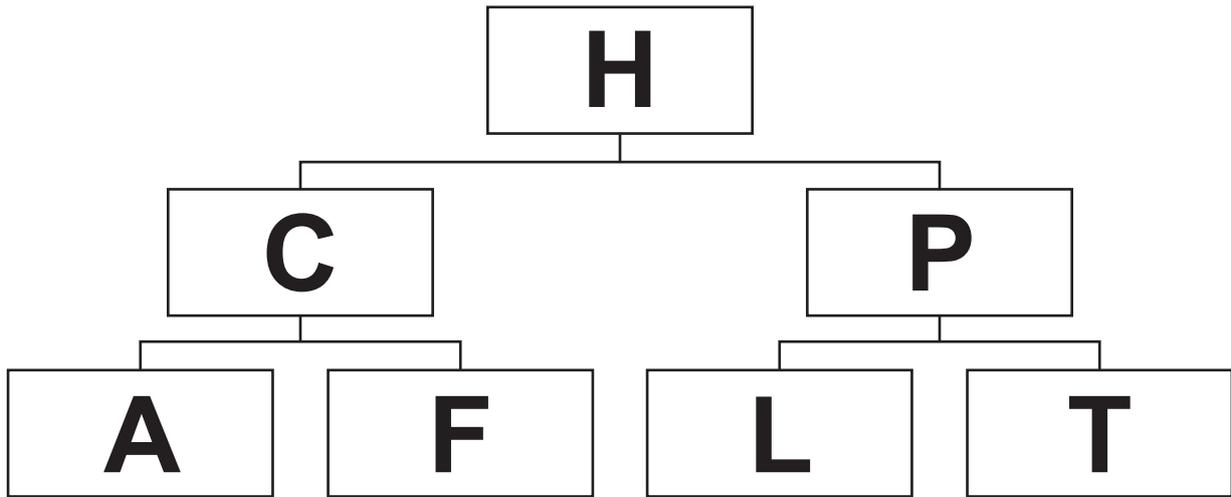


..... [4]

- (vi) Explain how backtracking is used in depth-first (post-order) traversals.

.....  
.....  
.....  
..... [2]

(b) A graph is another type of data structure.

An example graph is shown in **Fig. 1**.

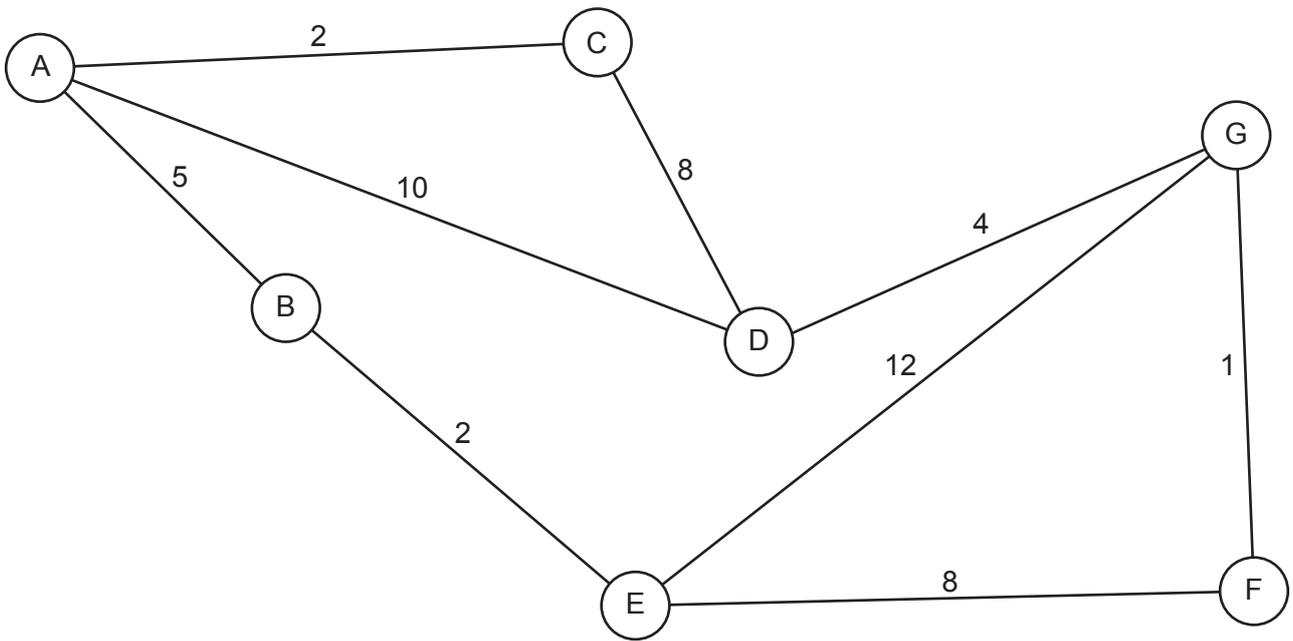

**Fig. 1**

7

Show how Dijkstra's algorithm can be used on the graph shown in **Fig. 1** to find the shortest path from start node A to end node G.

You must state the nodes on the final path and the distance of this path. Show your working.

You may use the table below to give your answer.

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

Node	Distance travelled	Previous node

Final path: .....

Distance: .....

[6]



.....

.....

.....

.....

.....

.....

3 A program stores data in a linked list.

The current contents of the linked list are shown in **Fig. 3**, along with the linked list pointers.

<b>headPointer</b>	1
<b>freeListPointer</b>	4

location	data	pointer
0	"blue"	6
1	"red"	0
2	"green"	8
3	"orange"	NULL
4		5
5		7
6	"grey"	2
7		9
8	"purple"	3
9		NULL

**Fig. 3**

(a) State the purpose of `headPointer` and `freeListPointer` in the linked list shown in **Fig. 3**.

`headPointer` .....

.....

`freeListPointer` .....

.....

**[2]**

(b) State the meaning of the pointers with the value `NULL` in the linked list shown in **Fig. 3**.

.....

..... **[1]**

(c) A procedure outputs the data in the linked list shown in **Fig. 3** from the first item in the list, to the last item.

Give the output from the procedure.

.....

..... **[2]**



4 A programmer has designed a program that includes a reusable program component.

- (a) The reusable program component is a function called `isInteger()`. This will take a string as an argument and then check that each digit is between 0 and 9. For example if 103 is input, it will check that the digits 1, 0 and 3 are each between 0 and 9.

The `asc()` function returns the ASCII value of each digit. For example `asc("1")` returns 49.

The ASCII value for 0 is 48. The ASCII value for 9 is 57.

```

01  function isInteger(number)
02      result = true
03      for count = 0 to number.length-1
04          asciiValue = asc(number.substring(count, 1))
05          if not(asciiValue >= 48 and asciiValue <= 57) then
06              result = false
07          endif
08      next count
09      return result
10  endfunction

```

- (i) Identify **one** identifier used in the function `isInteger()`.

..... [1]

- (ii) Give the line number where the branching (selection) construct starts in the function `isInteger()`.

..... [1]

- (iii) Give the line number where the iteration construct starts in the function `isInteger()`.

..... [1]

(b) Describe the purpose of the following lines in the function `isInteger()`.

Line 03 .....

.....

Line 04 .....

.....

Line 09 .....

.....

[3]

(c) Give **two** reasons why reusable program components are used in programs.

1 .....

.....

2 .....

.....

[2]

5 A recursive pseudocode function, recursiveAlgorithm(), is shown.

```
01 function recursiveAlgorithm(value)
02     if value <= 0 then
03         return 1
04     elseif value MOD 2 = 0 then
05         return value + recursiveAlgorithm(value - 3)
06     else
07         return value + recursiveAlgorithm(value - 1)
08     endif
09 endfunction
```

(a) Describe the key features of a recursive algorithm.

You may refer to the function, recursiveAlgorithm() in your answer.

.....

.....

.....

.....

.....

.....

..... [3]

(b) Trace the recursive function, `recursiveAlgorithm()`, and give the final return value when called with `recursiveAlgorithm(10)`. You may choose to use the table below to give your answer.

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

Function call	value	return

Final return value ..... [5]



**PLEASE DO NOT WRITE ON THIS PAGE**



.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

(b) The program designer is investigating the use of concurrent processing.

(i) Describe what is meant by the term 'concurrent processing'.

.....  
.....  
.....  
..... [2]

(ii) Give **two** benefits of using concurrent processing.

1 .....  
.....  
2 .....  
..... [2]



(d) The programmer uses an Integrated Development Environment (IDE).

Complete the table by identifying **and** describing **three** IDE features that can help the programmer to develop, or debug a program.

IDE feature	Description

[6]

8 A program is being designed that will allow a user to log into an account on a website using a username and password.

(a) Identify **two** possible inputs and **one** output this program will need.

Input 1 .....

.....

Input 2 .....

.....

Output .....

.....

[3]

(b) Identify **two** possible sub-procedures that could be used in this program.

1 .....

.....

2 .....

.....

[2]

**PLEASE DO NOT WRITE ON THIS PAGE**

Section B

9 A text-based computer game allows a user to dig for treasure on an island. The island is designed as a grid with 10 rows and 20 columns to store the treasure. Each square is given an x and y coordinate. Some of the squares in the grid store the name of a treasure object. Each treasure object has a value, e.g. 100 and a level, e.g. "Bronze."

(a) The computer game makes use of abstraction.

(i) Describe what is meant by the term abstraction and give an example of how abstraction can be used in the treasure game.

Description: .....

.....

.....

.....

Example: .....

.....

[3]

(ii) Give **three** benefits of using abstraction when writing a program.

1 .....

.....

2 .....

.....

3 .....

.....

[3]



(ii) The get method `getLevel()` will return the appropriate attribute.

Write the method `getLevel()` using either pseudocode or program code.

.....  
.....  
.....  
..... [2]

(iii) Describe the object-oriented programming technique being used in part 9(b)(ii).

.....  
.....  
.....  
..... [2]

(c) A class, Board, is used to store the 10 row (x coordinate) by 20 column (y coordinate) grid.

The design for the Board class, its attributes and methods is shown here.

class: Board
attributes: private grid : Array of Treasure
methods: new() function getGridItem(x, y) function setGridItem(x, y, treasureToInsert)

The constructor initialises each space in the grid to a treasure object with value as -1 and level as an empty string.

Complete the following pseudocode for the constructor method.

```
public procedure new()  
  for row = ..... to 9  
    for column = 0 to .....  
      ..... [row, column] = new Treasure(....., "")  
    next .....  
  next row  
endprocedure
```

[5]





.....

.....

.....

.....

.....

**END OF QUESTION PAPER**

**ADDITIONAL ANSWER SPACE**

If additional space is required, you should use the following lined page(s). The question number(s) must be clearly shown in the margin(s).

A large rectangular area with a vertical line on the left side and horizontal dotted lines across the page, intended for writing answers.



**Copyright Information**

OCR is committed to seeking permission to reproduce all third-party content that it uses in its assessment materials. OCR has attempted to identify and contact all copyright holders whose work is used in this paper. To avoid the issue of disclosure of answer-related information to candidates, all copyright acknowledgements are reproduced in the OCR Copyright Acknowledgements Booklet. This is produced for each series of examinations and is freely available to download from our public website ([www.ocr.org.uk](http://www.ocr.org.uk)) after the live examination series.

If OCR has unwittingly failed to correctly acknowledge or clear any third-party content in this assessment material, OCR will be happy to correct its mistake at the earliest possible opportunity.

For queries or further information please contact The OCR Copyright Team, The Triangle Building, Shaftesbury Road, Cambridge CB2 8EA.

OCR is part of Cambridge University Press & Assessment, which is itself a department of the University of Cambridge.